

## Pallet Lifters

### Specifications, TSE 750


Type	TSE 750
Art nr	613644
Capacity	750 kg
Lift stroke	900 mm
Lowest height	10 mm
Length	1245 mm
Width	1040 mm
Lifting time	13 sec
kW	0,75
Weight pack. incl.	340 kg



### Accessories, TSE 750


#### Limit switch

Stops lift at pre-set height, fully adjustable.

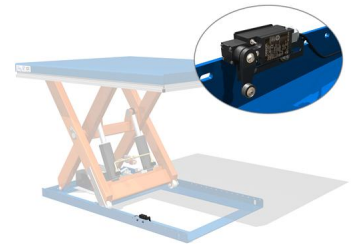


#### Foot control unit

A very good solution when you must have both hands free.

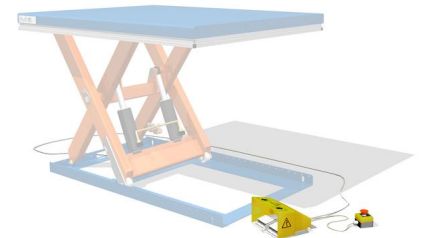


#### External power pack in plastic cover

Fully protected, a remote power pack makes access for servicing easy.

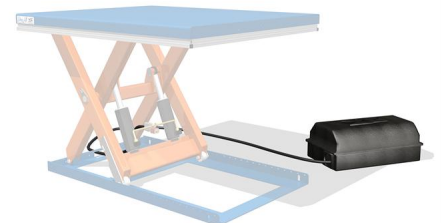


## External power pack with steel cover

Provides extra protection in exposed environments. Also provides protection if there is a risk for falling objects hitting the power pack.

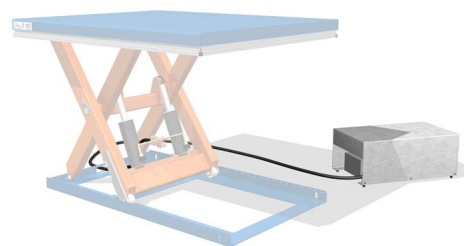

## Photocells

Automatic lifting and lowering of the lift table.

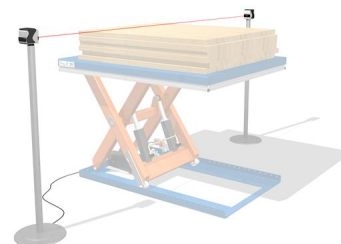

## Packaging

In a rigid and durable wooden casing, in order to allow multiple handling and a safe arrival of the goods. Our product packaging is also available in a "classified version" in compliance with ISPM 15.



## Pallet lifters

EdmoLift's Pallet Lifter handles materials to working heights of up to 980 mm. The Pallet Lifter has clear leg and foot space on three sides which gives superior access and makes working simpler and more efficient. With our accessory, the transport trolley, the Pallet Lifter is made mobile. This offers two very practical advantages. Firstly, it can be easily moved out of the way for tidying-up and cleaning purposes. Secondly, it can serve more than one working area which makes the investment even more worthwhile and cost effective.

A pallet or container can be placed directly onto the Pallet Lifter with a hand pallet truck or forklift truck. TSL models have a minimum height of 70 mm and the TSE model just 10 mm. The Pallet Lifter type TSLN has a variable speed tilting function and can be tilted 40° to the left or to the right. This makes the operators job easier as an "ergonomic window" is created, taking away the need for the operator to bend around and stretch to see past obstructions, as well as providing an excellent general view of the load.

The TSL and TSLN models are equipped with a T-shaped base frame for optimal working ergonomics. With nothing in the way of the operator's feet on three sides, it enables him/her to get closer to the material during loading and unloading. With a variety of designs and models, load capacity between 1000 kilos and 1500 kilos and possibilities for unique tailor-made solutions, we can offer a very large selection of flexible Pallet Lifters to our customers.

### Product features

- The load capacity of the Pallet Lifter is a maximum of 1500kg.
- The Pallet Lifter can be tailor-made for customers, and custom-build forks are offered on request.
- The Pallet Lifter enables great access on three sides.
- High lifting height - 980mm.
- Complies with European safety standard EN 1570-1 - CE certified.
- 24 V DC control unit and operating device with deadman's switch.
- IP54 approved electrical system.
- Overload protection.
- Adjustable trap prevention safety trip bars on all sides of the forks.
- The Pallet Lifters are equipped with hose burst valves. TSL/TSE do not include mechanical locks for servicing and maintenance.
- Maintenance-free bearing surface.
- PLC control for easy adaptation of particular requirements.
- User manual in 20 different languages.