


Lift Tables - Lorry Loader

Specifications, TTV 6000

Type	TTV 6000
Art nr	88728
Capacity	6000 kg
Lift stroke	1300 mm
Lowest height	450 mm
Length	2200 mm
Width	1500 mm
Lifting time	35 sec
kW	3,6
Weight pack. incl.	800 kg

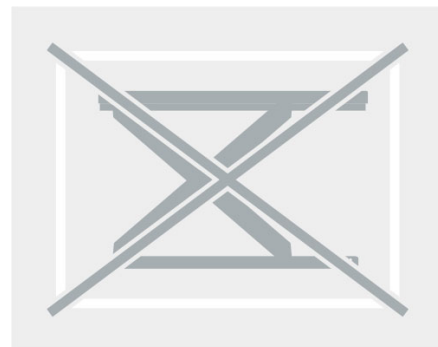

Lift Tables - Lorry Loader

EdmoLift's Lorry Loader is developed to be used on loading platforms for the loading and unloading of vehicles.

The Lorry Loader evens out the difference in level between the vehicle and the permanent loading platform. The Lorry Loader is designed and equipped to handle the great stresses that result when lorries and other vehicles pass over it.

The standard model of the Lorry Loader is equipped with mechanical stops in the base frame and an 8 mm tear plate on top of the reinforced platform which allows for a wheel pressure of 2 metric tons driving over it while the Lorry Loader is in its closed position. Reinforced platforms that can withstand up to 6 metric tons of wheel pressure are available for our Lorry Loaders if our customers need it.

The Lorry Loaders are available in different colors, with a range of different accessories or control units - all tailored to the needs and requirements of the customer. Even more functionality can be achieved with the addition of various accessories.

A few examples of these are the remote hydraulic unit, upper limit position, loading flap, self-supporting base frame, rollback stop, inspection cover, guard rails and gates.

Product features

- Lorry Loader load capacity - max 4000 kg.
- Lorry Loader length from 2500 mm to 3000 mm for the standard design.
- Comprehensive accessory program with possibilities for tailor-made customer solutions.
- Complies with European safety standard EN 1570-1 - CE certified.
- 24 V DC control unit and operating device with deadman's switch.
- IP54 approved electrical system.
- Safety spacing between all moving parts of the Lorry Loader.
- Overload protection.
- Adjustable trap prevention safety trip bars on all four sides of the platform.
- The Lorry Loader is equipped with hose burst valves and mechanical locks for service and maintenance.
- Maintenance-free bearing surface.
- PLC control for easy adaptation for particular requirements.
- User manual in 20 different languages.